





Overview

- Goal: Distill visual representations in large vision-language teachers into lightweight student models**, while allowing students to possess **strong open-vocabulary generalization ability towards out-of-distribution (OOD) concepts**.
 - Potential for deployment on mobile / IoT devices and robotics scenarios.
 - Experiments are conducted on small-to-medium datasets, allowing for fast research & development (R&D) cycles and is practical for lower-data regimes like 3D and robotics.
- Main Findings: 2 principles to enhance student's OOD generalizability:**
 - **Better imitate teacher's visual representation space**, and carefully promote **better vision-language alignment coherence** with the teacher.
 - **Enrich teacher's language representations** with more finegrained & meaningful attributes to effectively distinguish between different labels, both during distillation and inference. **This can be accomplished by prompting LLMs like ChatGPT.**

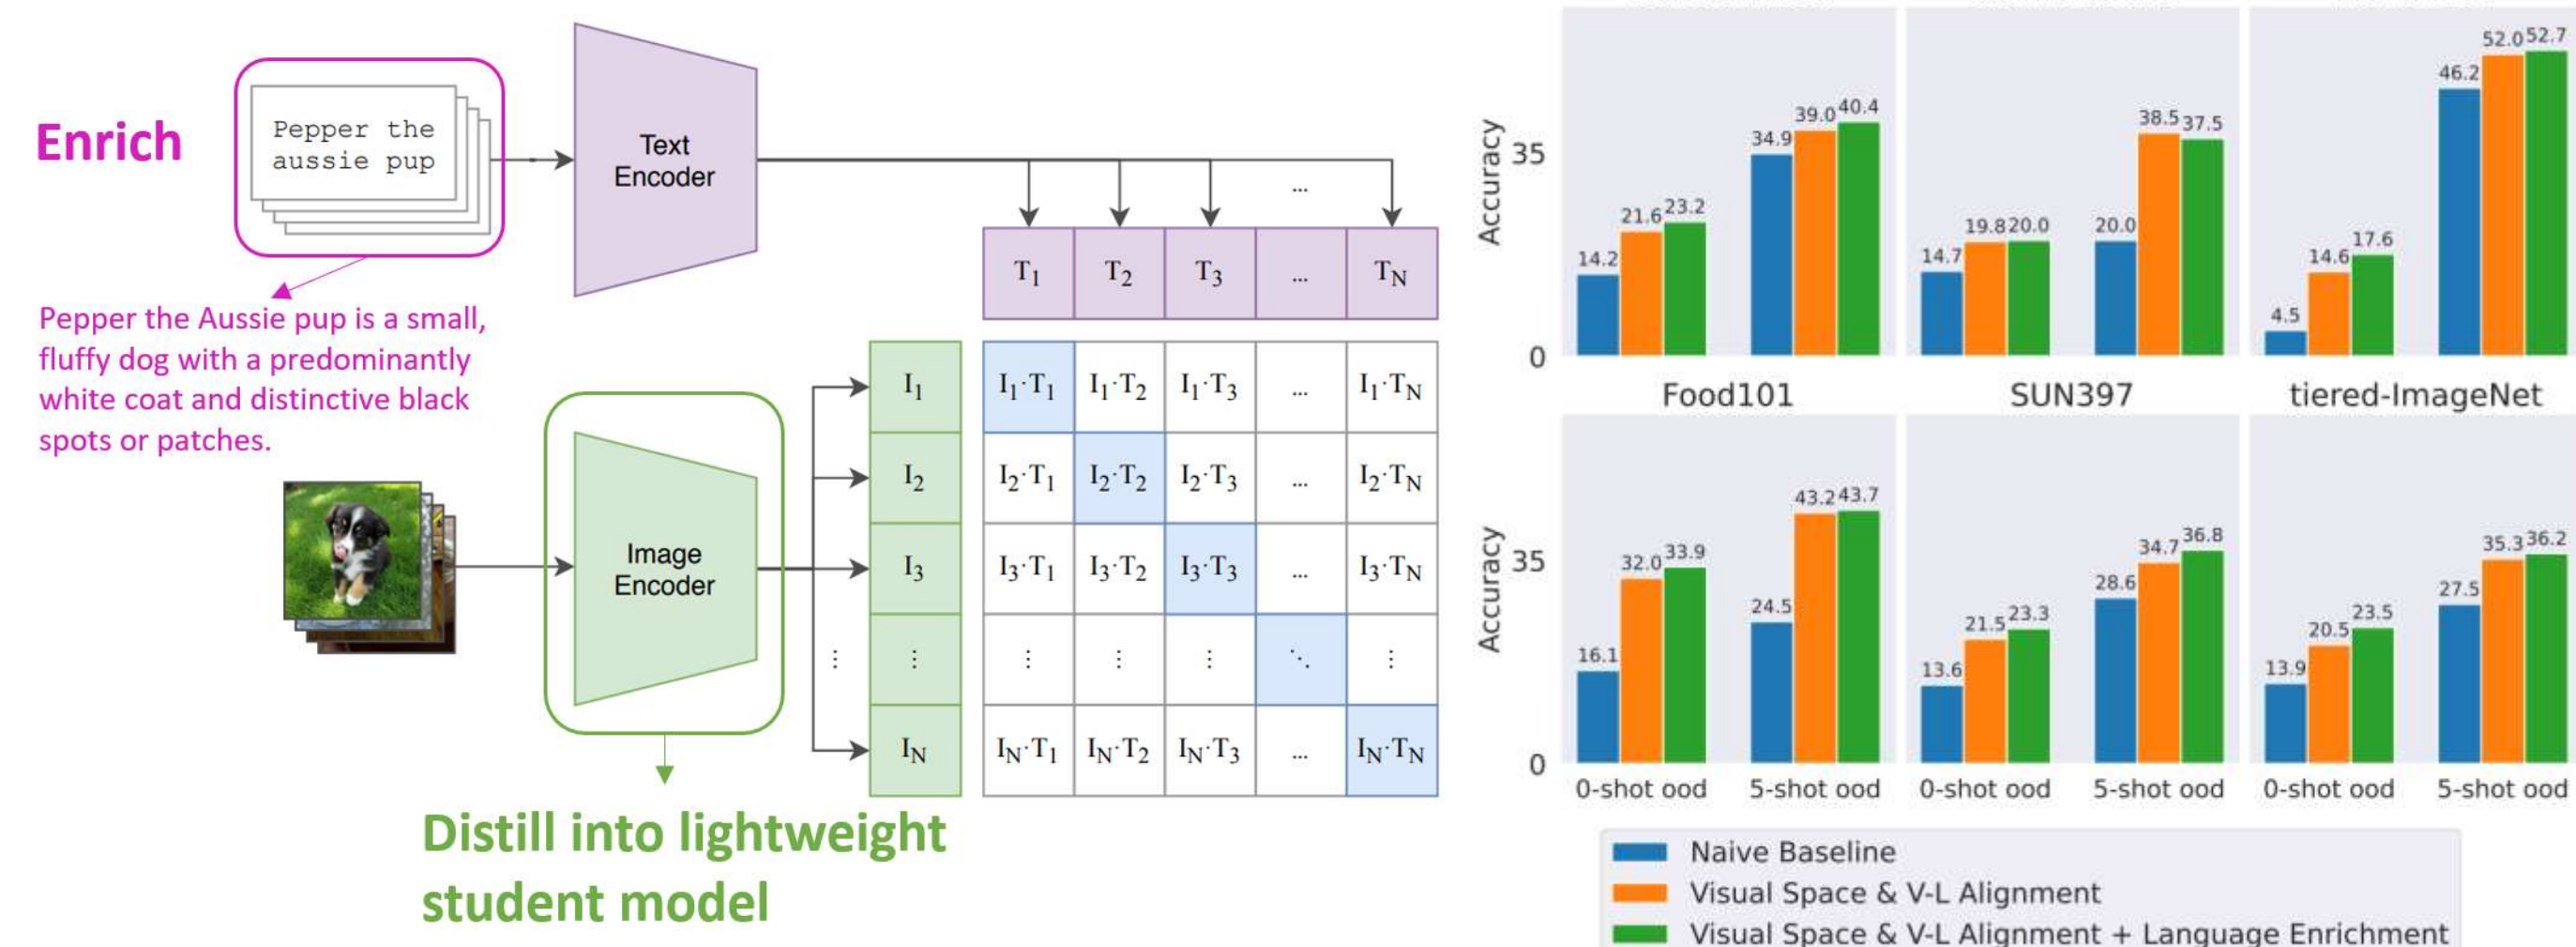

- Thus, maintaining teacher-student **coherence in local visual space structures** and **relative visual feature relationships** becomes crucial for student OOD generalization, as they *implicitly enhance vision-language alignments*.
- We find that **contrastive losses** like L_{im-cst} are especially beneficial for student OOD generalization, as it **enables much better student-teacher proximity in both local and relative visual feature structures**.

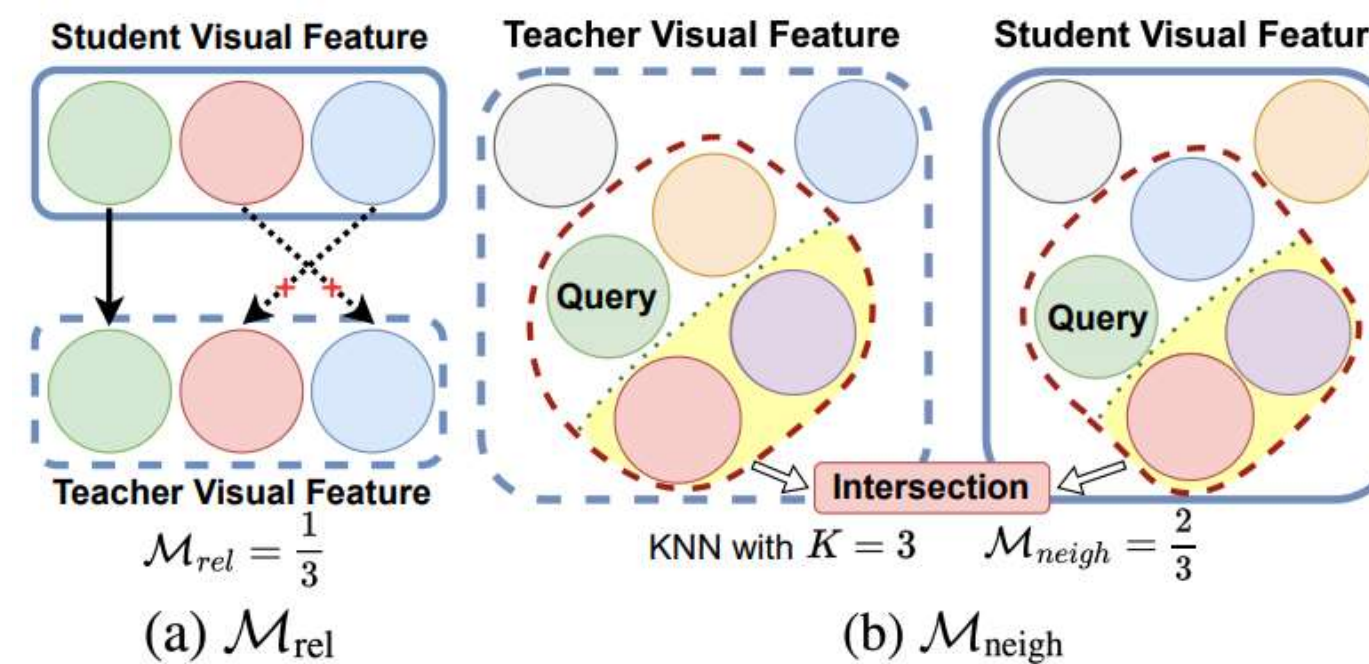

$$M_{rel}(\mathcal{X}) = \frac{\sum_{i=1}^{|\mathcal{X}|} \mathbf{1}[i = \operatorname{argmin}_j \|T_{img}(x_j) - S(x_i)\|_2^2]}{|\mathcal{X}|}$$

$$M_{neigh}(\mathcal{X}, k) = \frac{\sum_{i=1}^{|\mathcal{X}|} |\operatorname{KNN}(S, x_i, k) \cap \operatorname{KNN}(T_{img}, x_i, k)|}{k|\mathcal{X}|}$$

	$M_{rel} \uparrow$	$M_{neigh} \uparrow$	\mathcal{X}_{train}	\mathcal{X}_{ood}	$k=3$	$k=5$	$k=10$
$\mathcal{L}_{cls} + \mathcal{L}_{mse}$	0.030	0.004	0.13 / 0.06	0.18 / 0.07	0.27 / 0.08		
$\mathcal{L}_{cls} + \mathcal{L}_{mse} + \mathcal{L}_{im-cst}$	0.305	0.022	0.20 / 0.10	0.25 / 0.11	0.34 / 0.13		

($\mathcal{X}_{train}, \mathcal{X}_{ood}$) = (Train, OOD) datasets. For M_{neigh} , "x1/x2" indicate $M_{neigh}(\mathcal{X}_{train})$, $M_{neigh}(\mathcal{X}_{ood})$.

Teacher-Student Vision-Language Alignments

- Explicitly** enhance teacher-student vision-language alignment coherency.
- Carefully** preserve teacher's vision-language alignment structure by **filtering out teacher's image-text misalignments** (though e.g., L_{vlprox}).

$$\mathcal{L}_{cls}(x, y) = \sum_{y'} -\mathbf{1}_{y'=y} \log P_S(y'|x)$$

$$P_S(y|x) = \frac{\exp(\cos(S(x), T_{txt}(l(y))))/\tau}{\sum_{y' \in \mathcal{Y}} \exp(\cos(S(x), T_{txt}(l(y'))))/\tau)}$$

$$\mathcal{L}_{mse}(x) = \|S(x) - T_{img}(x)\|_2^2$$

$$\mathcal{L}_{im-cst}(x) = \frac{\exp(-\|S(x) - T_{img}(x)\|_2^2/\tau)}{\sum_{x'} \exp(-\|S(x') - T_{img}(x')\|_2^2/\tau)}$$

$$\mathcal{L}_{vlprox}(x, k) = I(x) \cdot \mathcal{D}_{KL}(P_{T, \text{topk}}(\cdot|x) \| P_{S, \text{topk}}(\cdot|x))$$

$$I(x) = \mathbf{1}[\operatorname{argmax}_y P_T(y|x) = \operatorname{label}(x)]$$

$$P_{\cdot, \text{topk}}(y|x) = \frac{\mathbf{1}_{y \in Y_{\text{topk}}}}{\sum_{y \in Y_{\text{topk}}} P(y|x)}; Y_{\text{topk}} = \operatorname{argtopk}_y P_T(y|x)$$

$$M_{vialign}(\mathcal{X}, k) = \frac{\sum_{i=1}^{|\mathcal{X}|} \# \operatorname{reverse_pairs}(\operatorname{arrS}(i, k))}{|\mathcal{X}|}$$

$$\operatorname{arrS}(i, k) = \left[\|S(x_i) - T_{txt}(l(y_j))\|_2 \right]_{j \in \mathcal{I}(i, k)}$$


$$\mathcal{I}(i, k) = \operatorname{argtopk}(\left[-\|T_{img}(x_i) - T_{txt}(l(y_j))\|_2 \right]_{j=1}^{|\mathcal{Y}|})$$

	Food101	SUN397
\mathcal{L}_{mse}	0.24 / 28.4°	0.36 / 34.9°
$\mathcal{L}_{mse}(\text{RN50})$	0.24 / 28.4°	0.35 / 34.4°
$\mathcal{L}_{cls} + \mathcal{L}_{mse}$	0.45 / 39.2°	0.71 / 49.8°
$\mathcal{L}_{cls} + \mathcal{L}_{mse} + \mathcal{L}_{im-cst}$	0.65 / 47.6°	0.82 / 53.8°
$\mathcal{L}_{cls} + \mathcal{L}_{mse} + \mathcal{L}_{im-cst} + \mathcal{L}_{vlprox}$	1.29 / 69.2°	1.28 / 68.9°

Average MSE / degree difference between student & teacher visual features for students trained with different strategies. Student: RN18; Teacher: CLIP ViT-L/14

Teacher-Student Visual Space Alignments

- Precisely matching teacher and student's high-dimensional visual spaces is inherently challenging** (with high MSE feature matching loss).
- In this case, **minimizing student-teacher visual feature distance does NOT yield the best OOD generalization ability for students**.

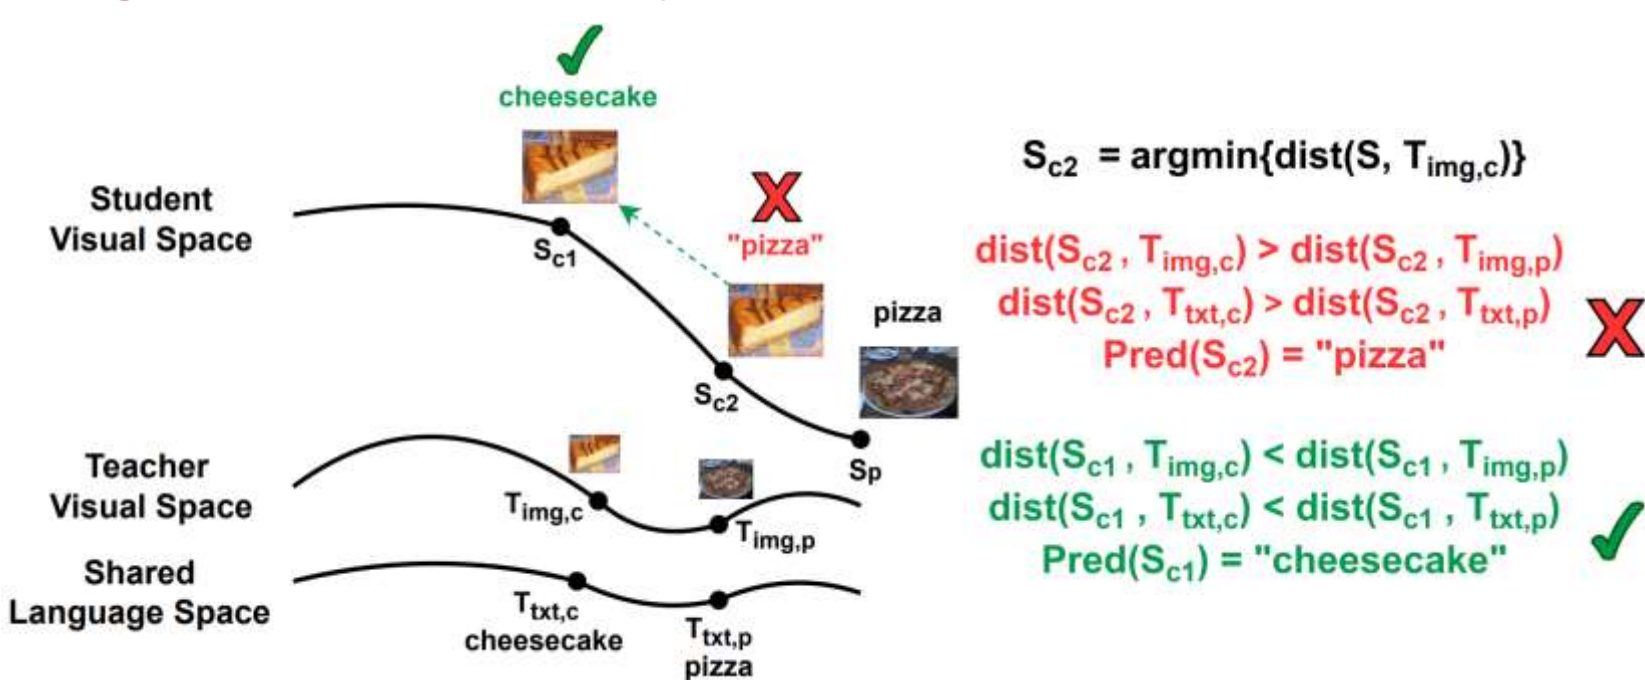

Language Representation Enrichment

- Prompt ChatGPT to enrich label descriptions:** "Use a single sentence to describe the appearance and shape of {cls}. Only describe the shape and appearance."
- ChatGPT-enriched descriptions are significantly more informative than e.g., auxiliary captions generated by OFA**, supplying comprehensive details to distinguish finegrained categories.



Original Description:

"A photo of an Acura Integra Type R 2001"

ChatGPT-Enriched:

"A photo of an Acura Integra Type R 2001. The 2001 Acura Integra Type R features a compact and sporty design with a sleek, aerodynamic body, sharp angles, and a distinctive rear spoiler."

Auxiliary Caption from OFA:

"A white car is parked in a field."

- ChatGPT-enriched language representation space confers more **independent & meaningful attributes to distinguish labels**, allowing **OOD text features to be more precisely aligned with image features**.

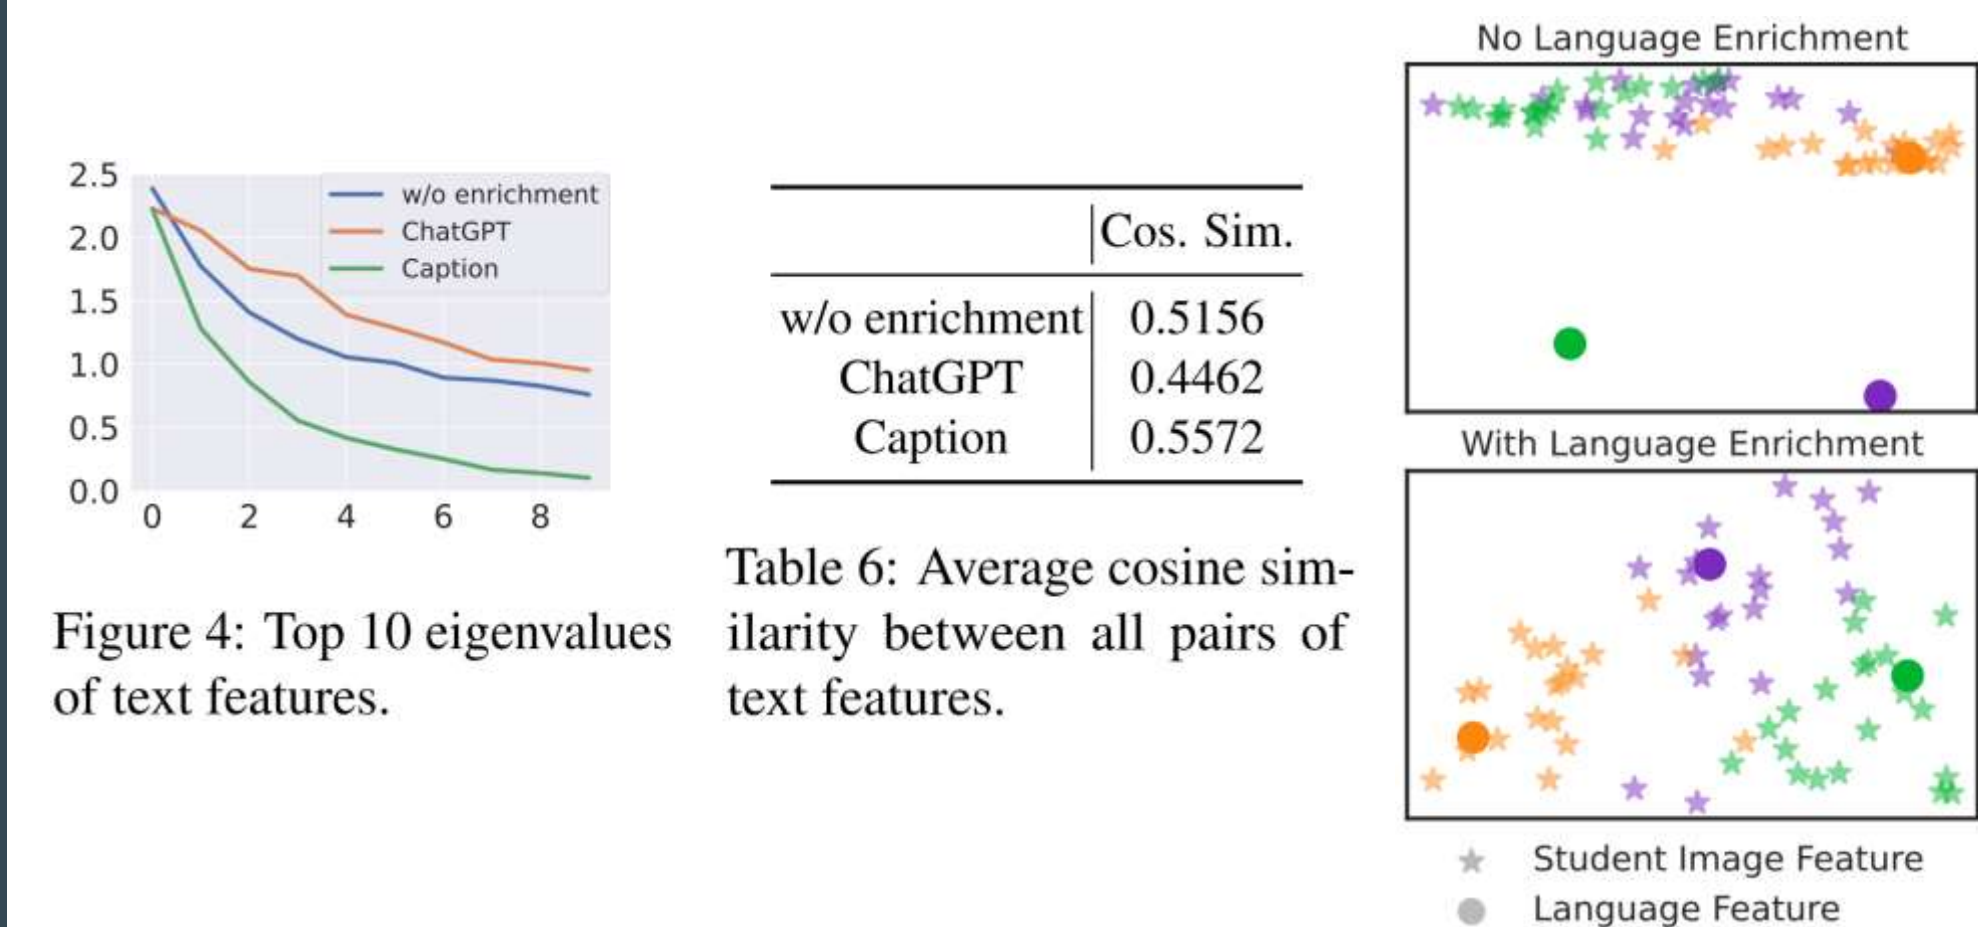


Figure 4: Top 10 eigenvalues of text features. Table 6: Average cosine similarity between all pairs of text features.

Applications (e.g., Robotics)



	\mathcal{X}_{id}	\mathcal{Y}_{id} on \mathcal{X}_{ood}	\mathcal{Y}_{ood} on \mathcal{X}_{ood}
Closed-Set	96.4 / 96.5	NA / 86.2	NA / 87.7
\mathcal{L}_{cls}	96.9 / 97.2	79.3 / 85.3	71.7 / 87.3
+ \mathcal{L}_{im-cst}	99.2 / 99.2	84.0 / 91.9	76.3 / 88.3
+ Semantic Enrich	98.2 / 99.0	84.3 / 92.0	83.0 / 89.6

(a) Overall accuracy over all YCB objects

	\mathcal{X}_{id}	\mathcal{Y}_{id} on \mathcal{X}_{ood}	\mathcal{Y}_{ood} on \mathcal{X}_{ood}
Closed-Set	91.6 / 91.9	NA / 57.8	NA / 35.9
\mathcal{L}_{cls}	94.0 / 94.4	46.5 / 54.7	23.3 / 32.8
+ \mathcal{L}_{im-cst}	98.1 / 98.0	55.3 / 70.8	23.7 / 47.3
+ Semantic Enrich	97.2 / 97.4	55.6 / 70.8	11.7 / 50.7

(b) F1-measure over objects that exist in observations. "x1/x2" indicate zero-shot and few-shot results